




Hawkeye® HX

Rugged, corrosion proof for all hazardous locations

The explosionproof Hawkeye, with its stainless steel enclosure, is designed for service in harsh process environments. It features a solid state proximity sensor which is encased in a shock absorbent urethane potting material. Outputs for universal switching or NAMUR (EN 60947-5-6; I.S.) are standard options.

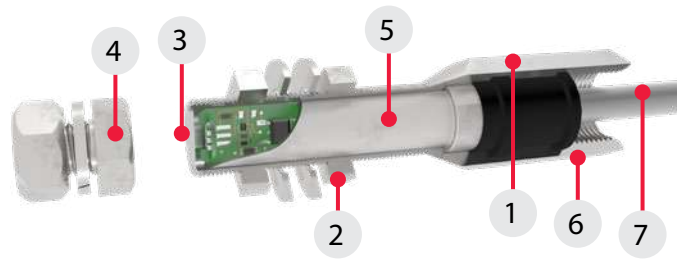

Features

1. **316 stainless steel enclosure** is extremely durable and corrosion resistant.
2. **Stainless steel washers and fasteners** included with HX enable secure vibration resistant mounting.
3. **Solid state magnetic sensor** detects trigger at distances up to 6 mm (extended sensing range also available).
4. **Magnetic trigger is embedded** and sealed with a wide-temperature corrosion-resistant urethane in the included stainless steel bolt.
5. **Sensor electronics are urethane sealed** in a module which is additionally sealed within the stainless steel enclosure assuring high tolerance to shock and vibration.
6. **All conduit/connector options (½" NPT, M20 and cable gland)** are available with standard 6-foot cord lengths allowing flexible wiring options.
7. **No seal offs are required** with explosionproof conduit systems, reducing installation costs.
8. **Suitable for most hazardous locations** explosionproof, flame proof Div 1/Zone 1; intrinsically safe Div 1/Zone 0.



Sensor specifications

SST switching sensors (35)

Configuration	(1) SST solid state sensor
Operations	Normally open (NO) <i>for Normally closed (NC), consult factory</i>
Maximum current inrush	1.0 amp
Maximum current continuous	0.1 amp
Maximum leakage current	0.25 mA (VAC) 0.15 mA (VDC)
Voltage range	20 - 250 VAC 8 - 250 VDC
Maximum voltage drop	6.5 volts @ 10 mA 7.2 volts @ 100 mA

Wiring diagram (35) normally open

NAMUR sensor (45)

Configuration	(1) NAMUR sensor (EN 60947-5-6; I.S.)
Operation	Normally closed (NC) NAMUR sensor (solid state)
Voltage range	5 - 29 VDC
Current ratings	Target on I < 1 mA Target off I > 3 mA

Wiring diagram (45)

Ratings

Explosionproof <i>(Ex d, Zone 1 or Class I and II, Div. 1)</i>	All models*
Intrinsically safe <i>(Ex ia, Zone 0 or Class I and II, Div. 1)</i>	Function 45*

Enclosure protection

Type 4, 4X and 6	All models
Ingress Protection 66 and 68	All models

Approvals*

See Stonel.com/approvals

* Only models listed on Stonel's official web site are approved per specific rating.

Model selector

SERIES

HX Explosionproof Hawkeye

FUNCTION

35 SST 240V sensor (NO type sensor)
45 NAMUR sensor (EN 60947-5-6; I.S.)

ENCLOSURE

S Stainless steel North American (NEC/CEC)
T Stainless steel International (IEC)

CONDUIT/CONNECTORS

01 (1) ½" - 14-NPT
02 (1) M20 x 1.5
03 Cable gland (Ex d) *[select enclosure option "T"]*

FEATURES

SM Standard

Model number example
HX 35 S 01 SM - OPTIONAL

MODEL NUMBER	PARTNERSHIP ID
Mounting hardware required and sold separately.	Some models may include 5-digit identification suffix.

Specifications

Materials of construction

Enclosure and fasteners	316 stainless steel
Trigger	316 stainless steel and urethane

Other specifications*

Conduit connection	½" NPT or M20
Wiring	72" (1.8 meters) length 18 gauge multi-strand in a single jacket ITC and PLTC rated
Sensing distance	4-6 mm <i>Extended range available</i>
Temperature range	-40° C to 80° C (-40° F to 176° F) <i>Consult factory for ultra-cold temperature</i>
Warranty	Five years

* Detailed technical specifications available in the installation manual available on Stonel's official web site. Consult factory for additional specifications.

Dimensions

