




Centrifugal pump LE

Quiet, gentle and efficient product pumping thanks to optimised fluid-dynamics design of volute-casing and impeller geometry. The dead space-free design allows hygienic operation and fast pump cleaning.

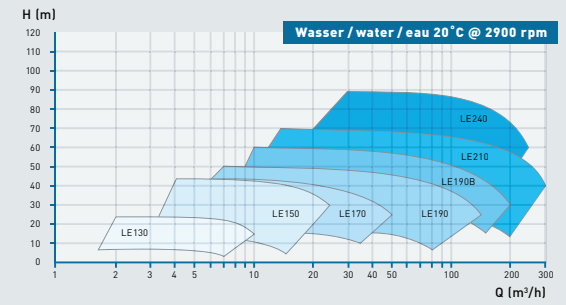

Features

- flow optimised volute casing and impeller designs with high efficiencies
- dead space-free design (hygienic design)
- very quiet operation
- CIP and SIP compliant
- simple design/low maintenance costs
- sturdy design comprising high-quality chromium-nickel-molybdenum stainless steel 1.4435 (316L) with electropolished surfaces
- pumping of solids-laden media with no risk of clogging
- ideal for fast temperature changes thanks to sturdy design
- the robust design allows handling of abrasive and corrosive media
- various mechanical seal systems available

Optional forms

- **ATEX** for zones 1, 2, 21 and 22
- **pharma design** for maximum safety, reliability and hygiene (surface roughnesses down to Ra < 0.4 µm)
- **magnetic coupling** hermetically sealed version LEM for crystallising, toxic, flammable and environmentally hazardous liquids
- **vertical installation** for simple residual drainage
- **bearing housing** for special requirements
- **inducer** for low NPSH_a values < 1 m
- **mobile** with sturdy trolley and accessories to customer requirements
- **heatable** with liquid or heating cartridge



The product is bottled or filled into containers with whisper-quiet operation and gentle pumping action.

 **Foodstuffs**

 **Beverages**

 **Pharmaceuticals / cosmetics**

 **Chemicals / industry**

Flow rate Q	max. 240 m ³ /h
Delivery head H	up to 90 m
Temperature range	minus 30°C to 130°C, max. 145°C (SIP)
Viscosity	up to approx. 500 mPas
Nominal pressure	PN10 to PN160